

测试报告

打印时间: 2026-8-13

报告编号: 20260813001

样品名称: p320

样品批号:

检测仪: NKT5200H

检测员: 1#

检测部门:

检测时间: 2026-08-13 10.01:10

送样时间: 2025-7-16

送样单位:

遮光度: 16.980%

样品折射率: 1.61 - 0.1i

介质折射率: 1.33

分散介质: 水

径距: 0.896

体积加权平均径D[4,3]: 58.39 μm

体积比表面积S/V: 1146.71 cm^2/cm^3

D0: 149.01 μm

D3: 105.05 μm


D10: 85.44 μm

D50: 54.99 μm

D90: 36.16 μm

D94: 33.16 μm

<150 μm : 100.00%	<125 μm : 99.40%	<100 μm : 95.82%	<80 μm : 86.41%	<60 μm : 86.41%
<63 μm : 65.73%	<50 μm : 38.75%	<40 μm : 16.67%	<28 μm : 1.79%	<20 μm : 0.06%
<14 μm : 0.00%	<10 μm : 0.00%	<7 μm : 0.00%	<5 μm : 0.00%	<3.5 μm : 0.00%
<2.5 μm : 0.00%		<1.5 μm : 0.00%		<1 μm : 0.00%

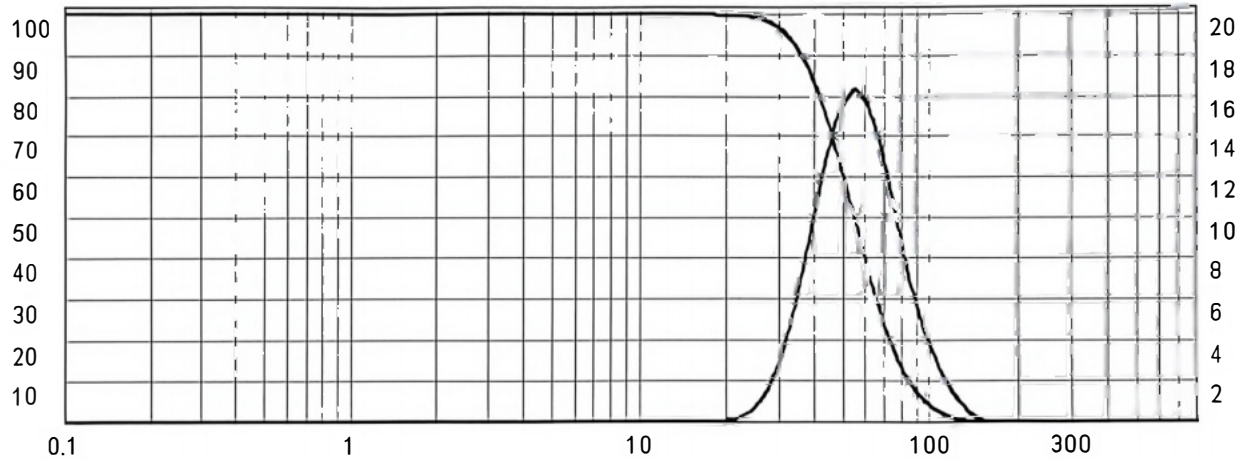

粒径 (μm)	体积%	累积%	粒径 (μm)	体积%	累积%	粒径 (μm)	体积%	累积%
0.100 - 0.115	0.00	100.00	2.094 - 2.405	0.00	100.00	43.86 - 50.37	14.88	75.29
0.115 - 0.132	0.00	100.00	2.405 - 2.761	0.00	100.00	50.37 - 57.83	16.38	60.41
0.132 - 0.151	0.00	100.00	2.761 - 3.171	0.00	100.00	57.83 - 66.41	15.28	44.03
0.151 - 0.174	0.00	100.00	3.171 - 3.641	0.00	100.00	66.41 - 76.26	11.97	28.75
0.174 - 0.200	0.00	100.00	3.641 - 4.181	0.00	100.00	76.26 - 87.57	7.93	16.78
0.200 - 0.229	0.00	100.00	4.181 - 4.801	0.00	100.00	87.57 - 100.5	4.81	8.85
0.229 - 0.263	0.00	100.00	4.801 - 5.513	0.00	100.00	100.5 - 115.5	2.64	4.04
0.263 - 0.302	0.00	100.00	5.513 - 6.330	0.00	100.00	115.5 - 132.6	1.15	1.40
0.302 - 0.347	0.00	100.00	6.330 - 7.269	0.00	100.00	132.6 - 152.2	0.25	0.25
0.347 - 0.399	0.00	100.00	7.269 - 8.347	0.00	100.00	152.2 - 174.8	0.00	0.00
0.399 - 0.458	0.00	100.00	8.347 - 9.584	0.00	100.00	174.8 - 200.7	0.00	0.00
0.458 - 0.525	0.00	100.00	9.584 - 11.01	0.00	100.00	200.7 - 230.5	0.00	0.00
0.525 - 0.603	0.00	100.00	11.01 - 12.64	0.00	100.00	230.5 - 264.7	0.00	0.00
0.603 - 0.693	0.00	100.00	12.64 - 14.51	0.00	100.00	264.7 - 303.9	0.00	0.00
0.693 - 0.796	0.00	100.00	14.51 - 16.66	0.00	100.00	303.9 - 349.0	0.00	0.00
0.796 - 0.914	0.00	100.00	16.66 - 19.13	0.03	100.00	349.0 - 400.7	0.00	0.00
0.914 - 1.049	0.00	100.00	19.13 - 21.97	0.15	99.97	400.7 - 460.2	0.00	0.00
1.049 - 1.205	0.00	100.00	21.97 - 25.23	0.55	99.82	460.2 - 528.4	0.00	0.00
1.205 - 1.383	0.00	100.00	25.23 - 28.97	1.61	99.27	528.4 - 606.7	0.00	0.00
1.383 - 1.588	0.00	100.00	28.97 - 33.27	3.78	97.66	606.7 - 696.7	0.00	0.00
1.588 - 1.824	0.00	100.00	33.27 - 38.20	7.22	93.88	696.7 - 800.0	0.00	0.00
1.824 - 2.094	0.00	100.00	38.20 - 43.86	11.37	86.66			